


## Safety & Security Film

100-micron - Clear

Code: SA-100CL-iSR

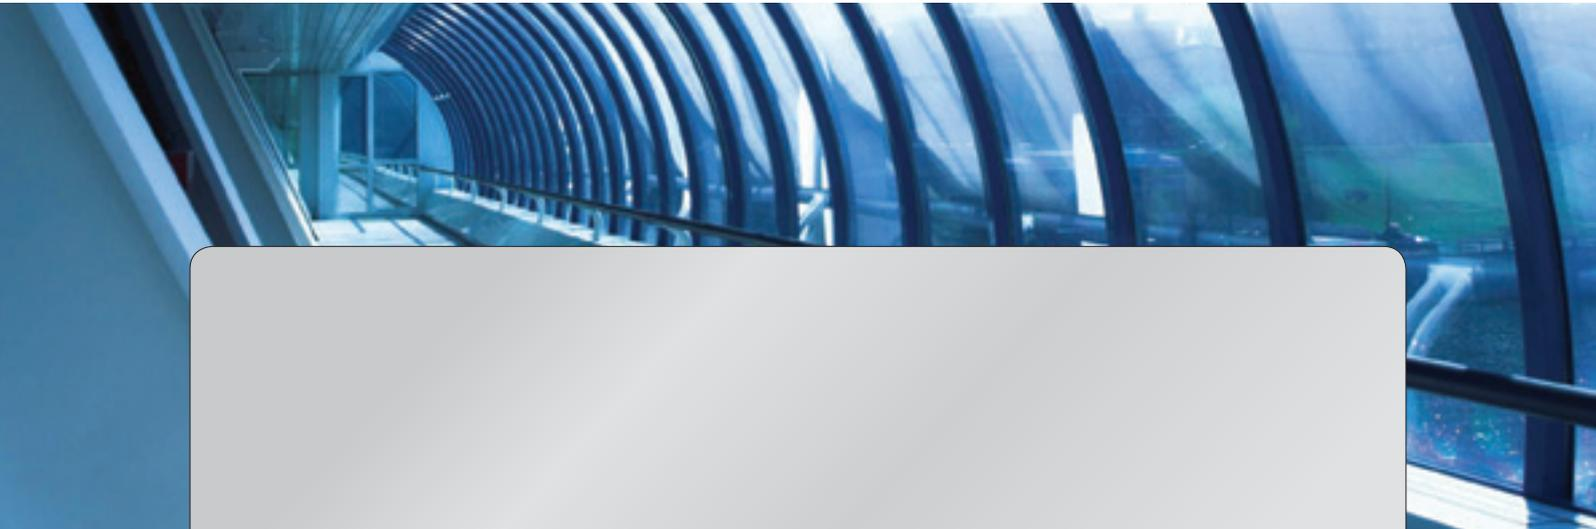

**Opalux® safety and security window films are designed to make glass safer, both by strengthening it against breakage and helping hold dangerous shards of shattered glass in situations where breakage does occur.**

Tested and certified to EN 12600 Class 2B2, Opalux® 100-micron clear safety and security film is used as a minimum specification for safety film and can be used by organisations to address Regulation 14 of the Workplace (Health, Safety and Welfare) Regulations 1992 by upgrading low-level glazing where necessary for reasons of health and safety.

Opalux® safety and security window films are suitable for use in many applications in the workplace and home.


Other benefits can include improved security by creating a deterrent to “smash-and-grab” and forced entry crime, and providing protection against the vandalism of glass through graffiti such as the etching or scratching of glass.

Features	Benefits
High optical clarity	Clear, non-tinted appearance on glass
Quick, retro-fit installation	Can be used where costly and disruptive large-scale replacement of existing glazing is not a viable option
Scratch-resistant	Suitable for most non-abrasive window-cleaning methods
Screening of harmful UV rays	Reduced fading of interior furnishings

## Safety & Security Film

100-micron - Clear

Code: SA-100CL-iSR

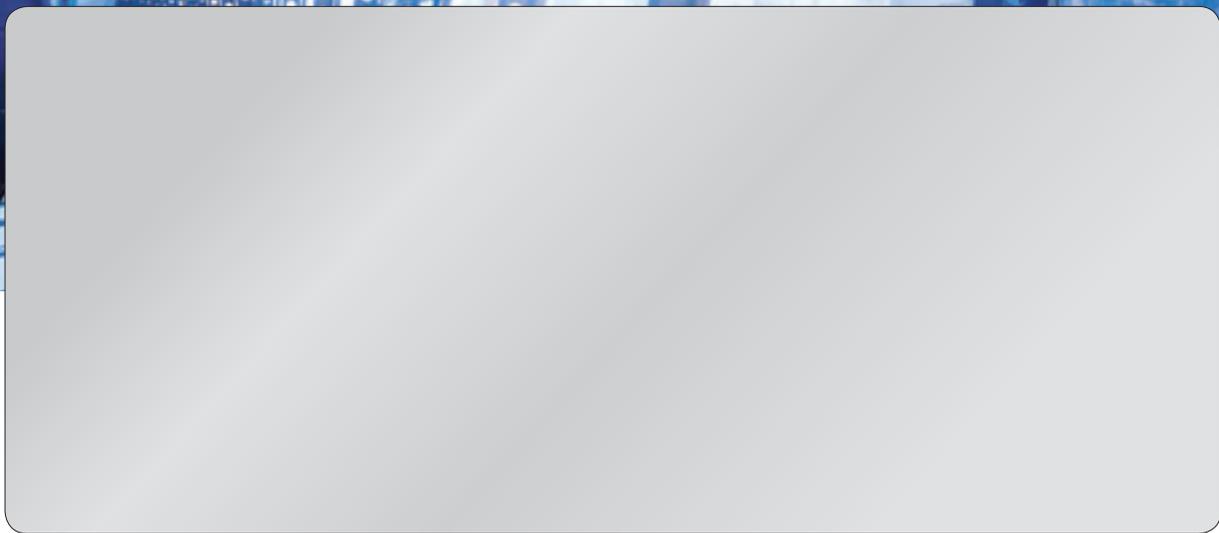

### Performance Data

Total Solar Energy	
Transmitted	78%
Reflected	9%
Absorbed	13%
Visible Light	
Transmitted	86%
Reflected	10%
Ultra-Violet Rejected	<98%
Shading Coefficient	0.93
Total Solar Energy Rejected	19%

### Physical Properties

Description	Clear
Film Thickness	100-microns (4-thou)
Structure	Single Ply
Tensile Strength	28,500 PSI
Break Strength	110 Pounds per Inch (width)
Adhesive Type	Acrylic Pressure Sensitive
Peel Strength	6 to 7 Pounds per Inch

Test results are produced from film applied to clear glass. Performance data is subject to change without prior notice. It is the users' responsibility to ensure the product is suitable for the intended use. The seller shall not be liable for any direct or consequential loss howsoever arising.

#### Specification:

The safety and security window film is to be Opalux® SA-100CL-iSR, as manufactured by Opalux®. The film is to be installed to the interior surface of the glass, and the unique product roll numbers used are to be registered in accordance with the manufacturer's warranty procedure.

(When specifying the exterior-grade version, please change the highlighted words as appropriate. Exterior version code: SA-100CL-eSR. Also, insert the additional clause - This exterior film must be correctly edge sealed).